


# solvoprint wallpaper ... NW

## Product information

- approx. 350 g/m<sup>2</sup> heavy, PVC coated non-woven
- approx. max. 500 µm thick
- **non-woven construction for easier removing from substrate**
- embossed / textured surface
- for wall covering
- can be installed with standard wallpaper tools
- ideal for creating customized interior design
- highest brilliance, photorealistic print quality, quick drying time
- good scratch resistance (depends on inks)
- printable with solvent based,- latex- and UV curable inks
- fire retardancy according to DIN 4102 B1
- fire retardancy according to EN 13501-1

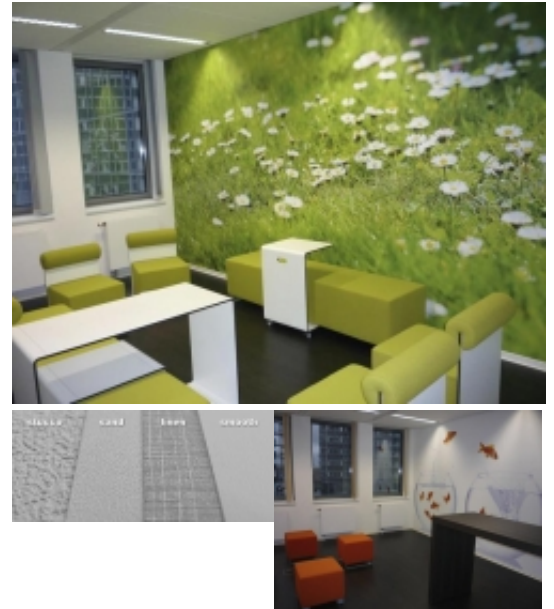

## Details

6026367	50 m x 130 cm	smooth
6026143	50 m x 130 cm	linen - As long as stock lasts!
6026366	50 m x 130 cm	sand
6026368	50 m x 130 cm	stucco



**For orders, sample requests, questions or suggestions please contact:**

Neschen AG | Hans-Neschen-Str. 1 | D-31675 Bückeberg

Phone: +49 (0) 57 22-20 70 | Fax: +49 (0) 57 22-20 71 59 | E-Mail: [info@neschen.de](mailto:info@neschen.de) | [www.neschen.com](http://www.neschen.com)